

868.3 MHz SUPER HETERODYNE AM/ASK RECEIVER

Cod. 32000608

DESCRIPTION:

Low cost Super Heterodyne ASK Receiver, manufactured in SMT technology on printed circuit.

HIGHLIGHTS:


On output pin has been realized a mono stable circuit in order to cancel short impulses that can be present in the received and already squared signal. So it can restore broken impulses integrity. It has been optimized for HCS and HT12E encodes. RSSI output is proportional to received signal level. Developed according to ETSI 300 220 European Standard.

APPLICATIONS:

Security systems, data transmissions, industry controls.



MECHANICAL CHARACTERISTICS

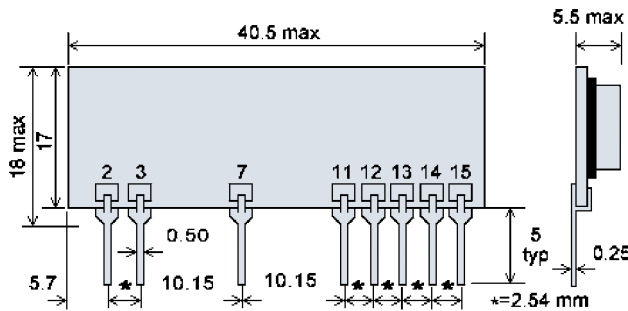

Segnali sui piedini

- 2 = GND
- 3 = RF Input (50Ω)
- 7 = GND
- 11 = GND
- 12 = + Vdc
- 13 = RSSI Output
- 14 = TTL Output - Data OUT
- 15 = + Vdc

ABS. MAX. RATINGS:

Power Supply, Vcc, pin 12, 15:	+ 6 Volt
Radio Frequency Input, pin 3:	+10 dBm
Storage Temperature:	- 40 ÷ + 100 °C
Operational Temperature:	- 20 ÷ + 70°C

ELECTRICAL CHARACTERISTICS AT THE TEMPERATURE OF + 25°C.

Parameter	Min.	Typ.	Max	Unit	Notes
Power Supply (Vcc)	4.5	5	5.5	Volt	
Supply Current	-	-	5.5	mA	
Receive Frequency	-	868.3	-	MHz	
Sensitivity (Squelch Threshold) at 25°C	-	-108	-	dBm	Note 1
RF Bandwidth at -3 dB	-	200	-	kHz	
Antenna Spurious RF Emission	-	-	-65	dBm	
Logic Low	GND	-	0.05	Volt	
Logic High	4	-	Vdc	Volt	
Baud Rate	-	-	2400	Baud	
Start-up Time	-	-	150	ms	
Power Down Supply Current	-	-	50	nA	
AF Output Impedance, pin 14, TTL	50	-	-	KΩ	

Note 1.: modulazione AM 100%, onda quadra a frequenza di 1 kHz.

Note 2.: all RF parameters measured with pin 3 connected to a 50Ω impeded signal source or load.

Mipot S.p.A. reserves the right to modify the specifications without notice.

MIPOT S.P.A.

Via Corona, n.5
(Zona Ind.)
34701 Cormons (GO)
Italy
Tel. +39 0481 630200 ra.
Fax +39 0481 62387
mipot@mipot.com